

SPECIFICATION SHEET

LED COMPACT DIMMABLE HIGH BAYS



The improved, high performance LED Compact Dimmable High Bay range suitable for factory and warehouse lighting.

Applications:

- Factories • Warehouses



Image shown COMHB150BD-2


Specification

| | |
|-----------------------------|--------------------------------|
| LED: | 160pcs-364pcs of Lumileds 3030 |
| Material: | Aluminium |
| Colour Temperature: | 6500K |
| Guarantee: | 5 Years |
| Life Expectancy: | 50,000 Hours |
| Working Temperature: | -30°C - 50°C |
| Power Factor: | >0.93 |
| Beam Angle: | 120° |
| CRI: | >80 |

Additional Information

- 1-10V Meanwell dimming driver included.
- 130lm/W (COMHB240BD-3 - 140lm/W).
- Black finish.
- Emergency conversion using EMLEDKIT3.
- Extended dimensions for the EMLEDKIT3: L: 515 x W: 38 x D: 42mm
- Hanging/Mounting eyelet.
- Polarity of dimming cables: Blue = + (positive) White = - (negative)
- Weight: 3.4kg-5.3kg

Dimensions

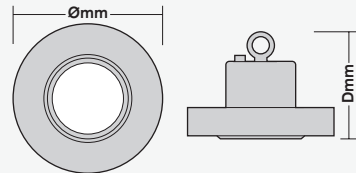

| Code | Description | Lumen Output | Dimensions (Ø x D mm) |
|--------------|-----------------------------------|--------------|-----------------------|
| COMHB100BD-2 | 100W | 13,000lm | 252 x 200 |
| COMHB150BD-2 | 150W | 19,500lm | 252 x 200 |
| COMHB200BD-2 | 200W | 26,000lm | 295 x 212 |
| COMHB240BD-3 | 240W | 33,600lm | 295 x 212 |
| COMHBHB-2 | Black Hanging Bracket | - | - |
| COMHBMSB-2 | Microwave Sensor Bracket | - | - |
| COMHBRPC70 | 70 Degree Polycarbonate Reflector | - | - |
| HLBDS | Daylight Sensor | - | 75 x 33 x 25 |
| HLBMS | Microwave Sensor | - | 72 x 59 |
| EMLEDKIT3 | Emergency Remote Box Flexi | - | 270 x 38 x 68 |



T: 0800 195 0006 F: 0870 195 0006
E: sales@redarrowtrading.com
www.redarrowtrading.com

Red Arrow Trading
Elsworth House, Herries Road South
Sheffield, S6 1QS